




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F02C 3/36, 3/20	A1	(11) International Publication Number: WO 98/51914 (43) International Publication Date: 19 November 1998 (19.11.98)
(21) International Application Number: PCT/US98/08627 (22) International Filing Date: 29 April 1998 (29.04.98) (30) Priority Data: 08/855,430 13 May 1997 (13.05.97) US (71) Applicant: WESTINGHOUSE ELECTRIC CORPORATION [US/US]; Westinghouse Building, Gateway Center, Pittsburgh, PA 15222 (US). (72) Inventors: NEWBY, Richard, A.; 149 Spring Grove Road, Pittsburgh, PA 15235 (US). YANG, Wen-Ching; 236 Mt. Vernon Avenue, Export, PA 15632 (US). BANNISTER, Ronald, L.; 695 Bear Creek Court, Winter Springs, FL 32708 (US). (74) Agents: MAIRE, David, G. et al.; Westinghouse Electric Corporation, Westinghouse Building, Gateway Center, Pittsburgh, PA 15222 (US).	(81) Designated States: CA, CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	

(54) Title: PARTIAL OXIDATION POWERPLANT WITH SEQUENTIAL COMBUSTION

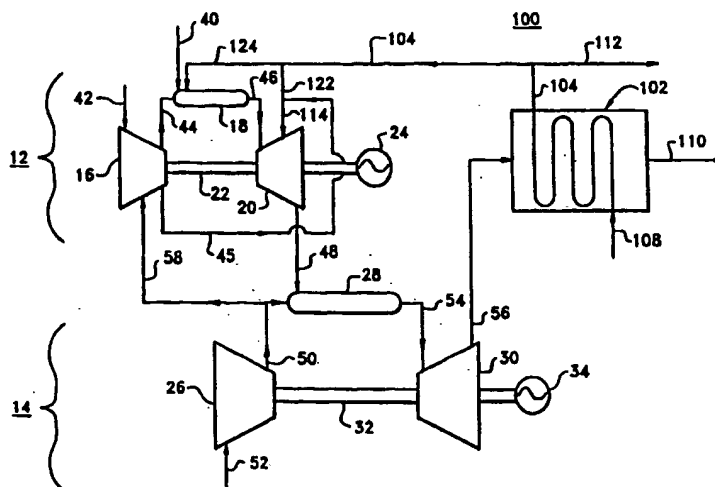

(57) Abstract

A system and method for generating power having an air compression/partial oxidation system, a turbine, and a primary combustion system. The air compression/partial oxidation system receives a first air stream and a fuel stream and produces a first partially oxidized fuel stream and a first compressed air stream therefrom. The turbine expands the first partially oxidized fuel stream while being cooled by the first compressed air stream to produce a heated air stream. The heated air stream is injected into the expanding first partially oxidized fuel stream, thereby reheating it in the turbine. A second partially oxidized fuel stream is emitted from the turbine. The primary combustion system receives said second partially oxidized fuel stream and a second air stream, combusts said second partially oxidized fuel stream, and produces rotating shaft power and an emission stream therefrom.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

- 1 -

PARTIAL OXIDATION POWERPLANT WITH SEQUENTIAL COMBUSTION

BACKGROUND OF THE INVENTION

This invention relates to staged combustion of fuel and partial oxidation of fuel.

Numerous approaches for improving the thermal performance of combustion turbine power generation systems have been proposed since the
5 early 1950s when combustion turbines were first applied for stationary power generation. Alternative approaches range from advanced topping and bottoming cycles, to advanced turbine firing conditions. Some of these approaches have been put into practice to reach the current level of
10 performance that combustion turbine power generation has evolved to today. The prevalent factor enhancing performance has been increases in firing conditions (temperatures and pressures) through advances in air foil design, materials and cooling methods. Cycle variations are also being developed to improve system performance in contrast to hardware improvements, such as
15 evaporative cooling cycles, recuperative cycles, intercooled cycles, humid air cycles, reheat cycles, advanced bottoming cycles, and elevated steam bottoming conditions.

Many proposed approaches for advanced combustion turbine power cycles have been rejected as being unworkable or uneconomical, and some
20 have not yet been developed sufficiently to be verified, demonstrated and

commercialized. Therefore, a need exists for new, viable approaches for improved power generation.

SUMMARY OF THE INVENTION

The claimed invention provides a system and method for generating
5 power having an air compression/partial oxidation system, a turbine, and a
primary combustion system. The air compression/partial oxidation system
receives a first air stream and a fuel stream and produces a first partially
oxidized fuel stream and a first compressed air stream therefrom. The turbine
expands the first partially oxidized fuel stream while being cooled by the first
10 compressed air stream to produce a heated air stream. The heated air stream
is injected into the expanding first partially oxidized fuel stream, thereby
reheating it in the turbine. A second partially oxidized fuel stream is emitted
from the turbine. The primary combustion system receives said second
partially oxidized fuel stream and a second air stream, combusts said second
15 partially oxidized fuel stream, and produces rotating shaft power and an
emission stream therefrom.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a partial oxidation power plant flow chart having a partial
oxidation turbine system with reheating and a primary turbine system.

20 Figure 2 shows the partial oxidation power plant flow chart of Figure 1
incorporating a steam generation system to provide steam to the partial
oxidation turbine system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Now referring to the figures, wherein like reference numerals refer to like
25 elements, and in particular to Figure 1, a partial oxidation turbine system 12
and a primary turbine system 14 are integrated to form a partial oxidation
power plant 10. (It shall be understood that "PO" represents "partial
oxidation.") The PO turbine system 12 has a PO air compressor 16, a PO
combustor 18 and a PO turbine 20. A shaft 22 extends from the PO turbine
30 20 to provide rotating shaft power to the PO air compressor 16 and a generator
24 when in operation. Other embodiments of the invention may not have the
generator 24 but may place both turbines on a single shaft. The primary turbine

-3-

system 14 has an air compressor 26, a combustor 28 and a turbine 30. A shaft 32 extends from the turbine 30 to provide rotating shaft power to the air compressor 26 and a generator 34.

In the PO turbine system 12, an air stream 42 and a fuel stream 40 are
5 processed to produce an expanded, partially oxidized fuel stream 48 and rotating shaft power. The air stream 42 is compressed in the PO air compressor 16 to produce first and second compressed air streams 44 and 45. The first compressed air stream 44 is directed into the PO combustor 18 along with the fuel stream 40, where the fuel stream is partially oxidized to produce a partially
10 oxidized fuel stream 46. In the preferred embodiment of the invention, the fuel stream 40 may be partially oxidized by operating the combustor 18 at a substoichiometric condition that achieves a turbine 20 inlet temperature of 1800°F to 2300°F. The partially oxidized fuel stream 46 is expanded in the PO turbine 20 to produce an expanded, partially oxidized fuel stream 48 and
15 to rotate the shaft 22, thereby providing rotating shaft power to the air compressor 16 and, in the case of excess power, to the PO generator 24 as well.

During the processing of the air stream 42 and the fuel stream 40, the second compressed air stream 45 cools the turbine 20 while reheating the
20 partially oxidized fuel stream 46 passing therethrough, thereby increasing the cycle efficiency. In a preferred embodiment of the invention, the stream 45 may cool the air foils (not shown) of the turbine in an open-loop system as is known in the prior art. Afterwards, the air stream 45 is injected into the turbine flow passage (not shown) and reacts with the expanding, partially
25 oxidized fuel stream 46 to further partially oxidize and reheat it. In a preferred embodiment of the invention, the volume of the compressed air stream 45 and the velocity of the air jets exiting the cooling holes (not shown) are selected to avoid overheating the exterior of the air foils. Further, the reheating increases the efficiency of the cycle and, potentially, reduces NO_x formation.

30 After exiting the PO turbine system 12, the expanded, partially oxidized fuel stream 48 is combusted in the primary turbine system 14. The expanded, partially oxidized fuel stream 48 is directed into the combustor 28 along with

a compressed air stream 50 to produce a combustor emission stream 54. The compressed air stream 50 is produced from an air stream 52 being compressed in the air compressor 26. The turbine 30 expands the combustor emission stream 54 to produce a power plant emission 56 and to rotate the shaft 32, thereby providing rotating shaft power to the generator 34 and the air compressor 26. A preferred embodiment of the invention may have the inlet temperature of the turbine 30 be approximately 1800°F to 2300°F for a conventional turbine or inlet temperatures of up to approximately 2600°F for an advanced turbine, with the turbine 30 being cooled either by open-loop air or closed-loop steam.

The combustion of the fuel stream 40 in two stages, first in the PO turbine system 12 and then in the primary turbine system 14, increases the net cycle efficiency. Some embodiments of the invention may use a compressed air bleed 58 to direct a portion of the compressed air stream 50 to the air compressor 16 of the PO turbine system 12 to increase the cycle efficiency.

Now referring to Figure 2, a partial oxidation power plant 100 comprises the PO turbine system 12 and the primary turbine 14 along with a steam generation system 102 for generating a steam flow 104 from the energy content of the power plant emission 56. The steam flow 104 is used in the PO combustor 18 and the PO turbine 20. In the embodiment of the invention shown in Figure 2, the steam generation system 102 is a heat recovery steam generator that provides a super-heated steam 104 from a water stream 108. The steam generation system discharges the energy-reduced power plant emission 56 as system exhaust 110. Other embodiments of the invention may use other suitable and equivalent steam generation systems, including an evaporator/economizer system, that generates steam with relatively less energy content.

In the embodiment of the invention of Figure 2, the steam flow 104 is split into the first portion 122 and a second portion 124. The first steam flow portion 122 is directed to the PO turbine 20 to help in cooling it. The second steam flow portion 124 is directed to the PO combustor 18 to reduce the possible formation of soot particles and to lower the flame temperature in the

combustor and, as a result, the generation of NO_x . Other embodiments of the invention may have other uses for the steam flow 104, including directing excess steam flow 112 from the steam flow 104 to a bottoming cycle (not shown) or for co-generation uses of process steam.

5 In a preferred embodiment of the invention, the steam flow first portion 122 is mixed with the second compressed air stream 45 prior to entering the turbine 20 as an air-steam mixture 114. The air-steam mixture 114 cooling the vanes, shroud, and blades on each stage by conventional cooling arrangements, and is then injected into the turbine flow passage to react with
10 and reheat the expanding partially oxidized fuel stream 46 (not shown). The quantity of the compressed air 45, the steam-to-air ratio, and the velocity of the air jets exiting the cooling holes of the turbine are selected to avoid overheating the exterior of the air foils. The extent of the reheat is controlled by the air-steam ratio in the mixture 114.

15 Other embodiments of the invention may have steam cooling of the latter stages of the PO turbine 20 to maintain the low-BTU fuel gas value of fuel stream 46 high enough so that sufficiently high temperature, with acceptable CO, can be achieved in the combustor 28 of the primary turbine system 14. Still other embodiments of the invention may have the steam flow first portion
20 122 enter the turbine 20 separately from the second compressed air stream 45.

 The result of providing cooling and reheating to the PO turbine 20 is to further increase the cycle efficiency of an already efficient two stage system. As the two stage combustion requires lower cooling requirements for the turbines, cycle efficiency increases through reduced compressed air demand.
25 A two stage system, such as power plant 10, has reduced NO_x emissions compared to a one stage power plant. The two stage power plant 100 has further reduced NO_x emissions compared to a one stage power plant because of the lower combustion temperature in the PO combustor 18 due to steam injection and the two stage combustion process.

30 An equivalent to having two separate turbine systems on two shafts is to have the systems on one shaft, with appropriate power and speed transmission means therebetween. Another equivalent is to have only one air

compressor supply compressed air to both combustors. The invention may be practiced with fuel other than natural gas. Additionally, the invention may be practiced with more than one PO turbine system, either arranged in series, parallel, or a combination thereof, producing partially oxidizing fuel streams for
5 the primary turbine system. Further, the invention may be practiced with any suitable partial oxidation turbine system and any suitable primary turbine system. Other embodiments of both power plants 10 and 100 may include additional optimizations to improve cycle efficiency. Consequently, the present invention may be embodied in other specific forms without departing from the
10 spirit or essential attributes thereof and, accordingly, reference should be made to the appended claims, rather than to the foregoing specification, as indicating the scope of the invention.

-7-

CLAIMS:

1. A power generation system comprising:
 - a) air compression/partial oxidation means for receiving a first air stream and a fuel stream and producing a first partially oxidized fuel stream and a first compressed air stream therefrom;
 - 5 b) expanding means for expanding said first partially oxidized fuel stream, cooling said expanding means with said first compressed air stream to produce a heated air stream, and reheating said expanding first partially oxidized fuel stream with said heated air stream to produce a second partially oxidized fuel stream; and
 - 10 c) primary combustion means for receiving said second partially oxidized fuel stream and a second air stream, combusting said second partially oxidized fuel stream, and producing rotating shaft power and an emission stream therefrom.
- 15 2. The power generation system of claim 1, further comprising a compressed air delivery means for delivering a second compressed air stream from said primary combustion means to said air compression/partial oxidation means.
- 20 3. The power generation system of claim 1, further comprising steam generation means for heating a water stream with energy from said emission stream to produce a steam flow.

4. The power generation system of claim 3, further comprising first steam flow delivery means for cooling said expanding means with a first portion of said steam flow.

5 5. The power generation system of claim 4, further comprising mixing means for mixing said first compressed air stream and said steam flow first portion prior to entering said expanding means.

6. The power generation system of claim 3, further comprising
10 second steam flow delivery means for delivering a second portion of said steam flow to said air compression/partial oxidation means.

7. A power generation system comprising:
a) a first turbine system comprising:
15 i) a partial oxidation air compressor with an air inlet and a compressed air outlet;
ii) a partial oxidation combustor with a compressed air inlet, a fuel inlet, and a partially oxidized fuel outlet;
iii) a partial oxidation turbine with a partially oxidized fuel
20 inlet connected to said partially oxidized fuel outlet, a compressed air inlet, and an expanded partially oxidized fuel outlet;
iv) delivery means for delivering first and second portions of a compressed air stream produced in said partial oxidation air compressor to said compressed air inlets of said partial oxidation combustor and said partial
25 oxidation turbine, respectively; and
v) first shaft extending through said partial oxidation turbine for producing rotating shaft power; and
b) a second turbine system comprising:
i) a primary air compressor with an air inlet and a
30 compressed air outlet;
ii) a primary combustor with a compressed air inlet connected to said primary air compressor compressed air outlet, a partially

oxidized fuel inlet connected to said partially oxidized fuel outlet, and a primary combustor emission outlet;

- iii) a primary turbine with a primary combustor emission inlet connected to said primary combustor emission outlet, and a primary
5 turbine outlet; and
- iv) second shaft extending through said primary turbine for producing rotating shaft power.

8. The power generation system of claim 7, wherein said partial
10 oxidation air compressor has a compressed air inlet connected to said primary air compressor compressed air outlet.

9. The power generation system of claim 7, wherein said primary
turbine has a primary turbine compressed air inlet connected to said primary air
15 compressor compressed air outlet.

10. The power generation system of claim 7, further comprising a
steam generator having a water inlet and a primary turbine emission inlet
connected to said primary turbine outlet, a steam outlet, and a system exhaust
20 outlet.

11. The power generation system of claim 10, wherein said partial
oxidation combustor has a steam inlet connected to said steam generator
steam outlet.

25

12. The power generation system of claim 10, wherein said partial
oxidation turbine has a steam inlet connected to said steam generator steam
outlet.

13. The power generation system of claim 10, wherein said partial
oxidation turbine compressed air inlet is connected to said steam generator
steam outlet.

30

14. The power generation system of claim 13, wh rein said partial oxidation combustor has a steam inlet connected to said steam generator steam outlet.

5

15. A method for generating power comprising the steps of:

- a) compressing a first air stream to produce a first compressed air stream;
- b) partially oxidizing a fuel stream in a first portion of said first compressed air stream to produce a partially oxidized fuel stream;
- 10 c) directing said partially oxidized fuel stream through a first turbine to produce an expanded partially oxidized fuel stream, said first turbine having first shaft extending therethrough for producing rotating shaft power;
- d) cooling said first turbine with a second portion of said first compressed air stream to produce a heated air stream;
- 15 e) reheating said partially oxidized fuel stream passing through said first turbine by mixing said heated air stream therewith to enable further partial oxidation;
- f) compressing a second air stream to produce a second compressed air stream;
- 20 g) combusting said partially oxidized fuel stream in at least a first portion of said second compressed air stream to produce combustion emission; and
- h) expanding said combustion emission in a second turbine to produce a second turbine emission stream, said second turbine having second shaft extending therethrough for producing rotating shaft power.
- 25

16. The method of claim 15, further comprising the step of directing a second portion of said second compressed air stream into said first compressed air stream.

30

17. The method of claim 15, further comprising the step of directing a third portion of said second compressed air stream into said second turbine.

18. The method of claim 15, further comprising the step of transferring
5 energy from said second turbine emission stream to a water stream to produce a steam flow.

19. The method of claim 18, further comprising the step of cooling said first turbine with a first portion of said steam flow.

10

20. The method of claim 18, further comprising the step of mixing said steam flow first portion and said first compressed air stream second portion prior to said cooling steps.

15 21. The method of claim 18, wherein said partially oxidizing step further comprises the steps of partially oxidizing said fuel stream in a partial oxidization combustor and injecting a second portion of said steam flow therein.

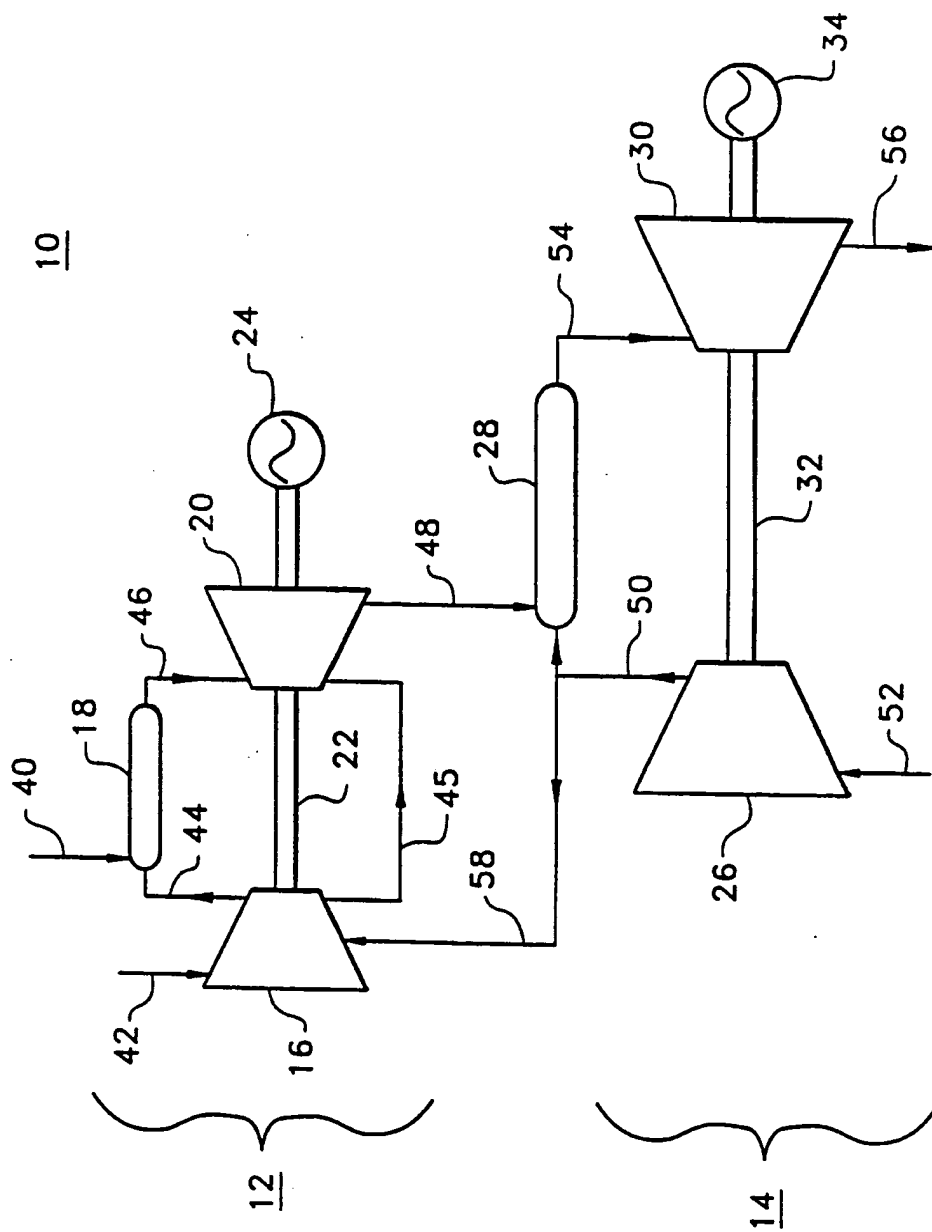


FIG. 1

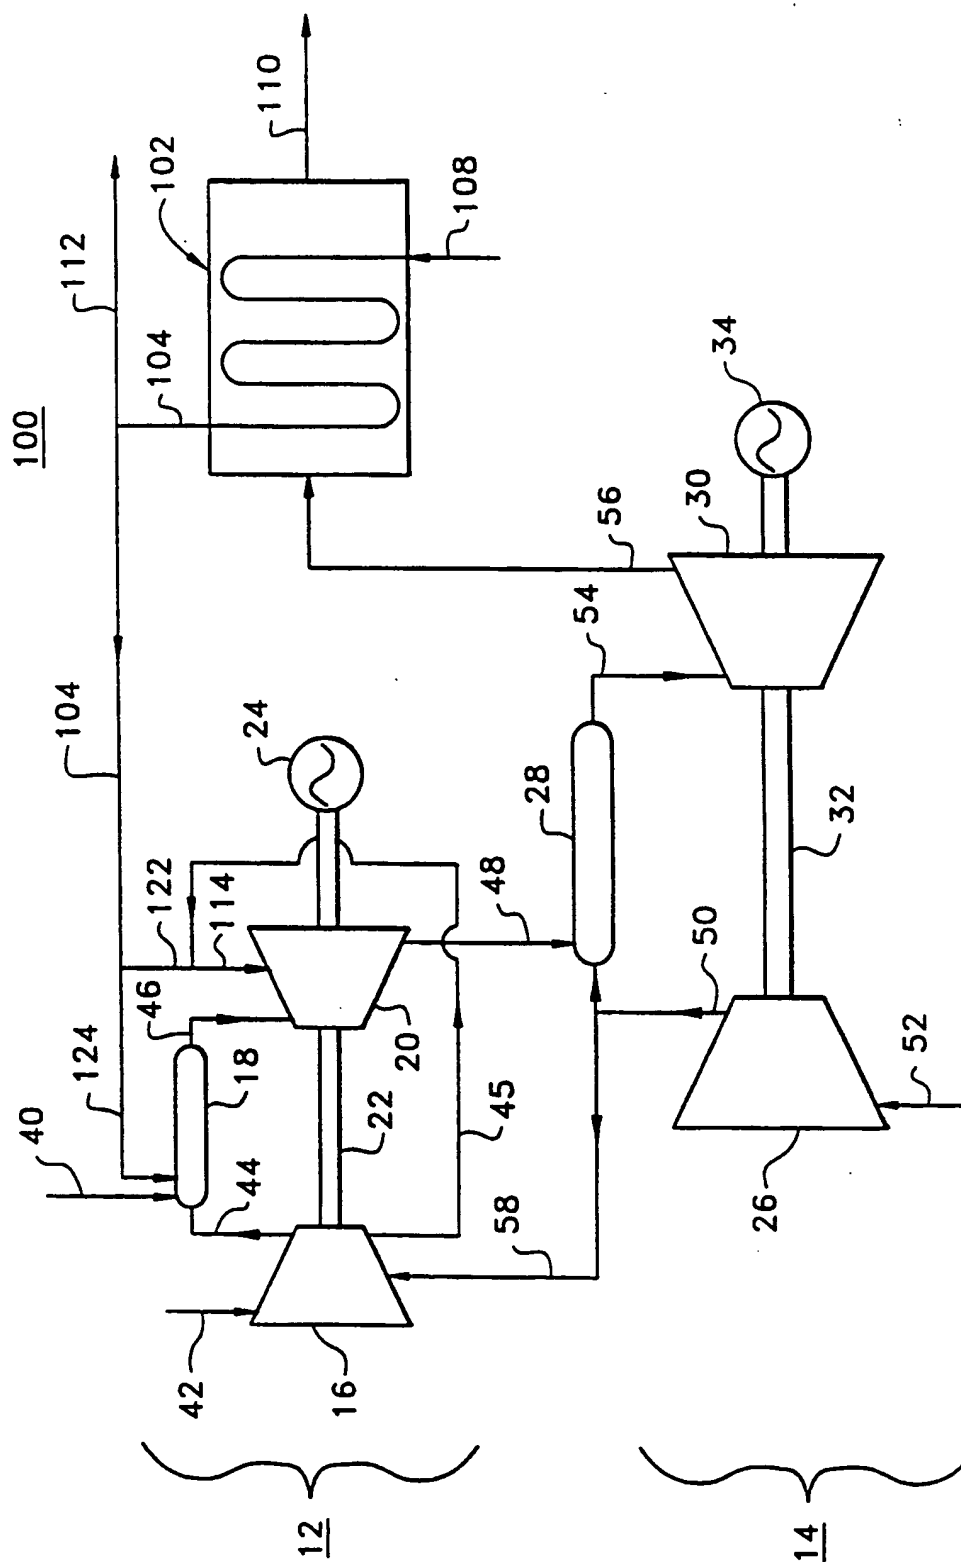


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/08627

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F02C3/36 F02C3/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F02C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 193 259 A (BARBER EVERETT M ET AL) 18 March 1980 see the whole document ---	1-21
X	US 2 511 385 A (UDALE) 13 June 1950	1,2,7-9, 15-17
Y	see the whole document	3-6, 10-14, 18-20
Y	GB 2 236 145 A (GEN ELECTRIC) 27 March 1991 see abstract; figures 1-3 ---	3-6, 10-14, 18-20
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 August 1998

Date of mailing of the international search report

01/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Iverus, D

INTERNATIONAL SEARCH REPORT

In' tional Application No
PCT/US 98/08627

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 288 640 A (ROLLS ROYCE PLC) 25 October 1995	1,2,7-9, 15-17
Y	see abstract; figure 1	3-6, 10-14, 18-20

X	GB 2 229 733 A (GEN ELECTRIC) 3 October 1990	1,7,15
	see abstract; figure 1	

X	NL 8 700 630 A (SHELL INT RESEARCH) 17 October 1988	1,7,15
	see claim 1; figures 1-3	

X	DE 950 613 C (MÜLLER) 11 October 1956	1
	see the whole document	

A	WO 91 05946 A (CATALYSTS & CHEM EUROP) 2 May 1991	1,7,15
	see page 7, line 7 - page 10, line 25; figures 1,2	

A	DE 34 13 241 A (BBC BROWN BOVERI & CIE) 13 June 1985	1,7,15
	see abstract; figures 1-3	

A	EP 0 595 026 A (ABB RESEARCH LTD) 4 May 1994	

A	US 4 381 641 A (MADGAVKAR AJAY M ET AL) 3 May 1983	

A	GB 2 191 215 A (HUMPHREYS & GLASGOW LTD) 9 December 1987	

A	US 3 882 671 A (NEBGEN WILLIAM H) 13 May 1975	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/08627

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4193259	A	18-03-1980	DE 3014380 A JP 1272208 C JP 55160126 A JP 59047137 B	04-12-1980 11-07-1985 12-12-1980 16-11-1984
US 2511385	A	13-06-1950	NONE	
GB 2236145	A	27-03-1991	IT 1243682 B JP 3096628 A SE 9002512 A	21-06-1994 22-04-1991 29-01-1991
GB 2288640	A	25-10-1995	JP 8042356 A US 5743081 A	13-02-1996 28-04-1998
GB 2229733	A	03-10-1990	DE 4008698 A FR 2644846 A IT 1241080 B JP 3017403 A US RE35061 E US 5103630 A	04-10-1990 28-09-1990 29-12-1993 25-01-1991 17-10-1995 14-04-1992
NL 8700630	A	17-10-1988	NONE	
DE 950613	C		NONE	
WO 9105946	A	02-05-1991	BE 1003760 A	09-06-1992
DE 3413241	A	13-06-1985	CH 665452 A	13-05-1988
EP 0595026	A	04-05-1994	DE 4236071 A JP 6207527 A	28-04-1994 26-07-1994
US 4381641	A	03-05-1983	NONE	
GB 2191215	A	09-12-1987	NONE	
US 3882671	A	13-05-1975	CA 975186 A US 3788066 A US 3877218 A	30-09-1975 29-01-1974 15-04-1975